


XV9440



4-port SFP+: 5-8

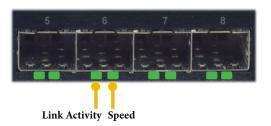

LED Description

	System Power	Solid Green	The system is powered on
		Off	The system is powered off
•	System Status	Solid Green	System is booted and ready to use
		Blinking Red/Green	The system is booting
		Off	The system is powered off
	HDD Activity	Blinking Amber	Data access activity
		Off	No data access activity

Link Activity

Solid Green Link has been established and there is no activity on this port

Blinking Green Link has been established and there is activity on this port

Off No link has been established

Speed

Solid Green Operating as a 10 Gigabit connection

Off No link has been established

Link Activity

Blinking Amber Link has been established and there is activity on this port

Solid Amber Link has been established and there is no activity on this port

Off No link has been established

Speed


Solid Ambar Operating as a Gigabit connection (1000 Mbps)

Solid Green Operating as a 100 Mbps connection

Off Operating as a 10 Mbps connection

4-port GbE: 1-4





1 Console port - 1 Management port



XV9440

Connectors, Pin-out, Cables



Interface	Description	Connector	Functionality
Console	1-port Console	RJ45	RS232 Local Management
Eth GbE	5-port GbE	RJ45	LAN / WAN connection
SFP+	4-port SFP+	SFP+	Optical Fiber WAN connection
USB1, 2	2-host USB 2.0 ports	USB	Local storage devices connection

Console Port


Pin 1,2,7,8: Non connected

Pin 3: TX

Pin 4,5: Ground

Pin 6: RX

RJ 45 Pin - out



Eth1-4 GbE Ports

Pin 1: White orange

Pin 3: White green

Pin 4: Blu

Pin 5: White blu

Pin 6: Green


Pin 7 White brown

Pin 8 Brown



Dual Power Supply

Redundancy support in its internal power units

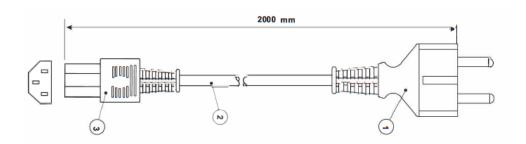

GENERAL SPECIFICATIONS

PLUG:

Three-pole termic printed Schuko 10/16A-250V with double ground contact. CEE - VII RAL 9005 black color.

CONNECTOR:

Three-pole straight 250V/10A IEC 60320-1 (C13) RAL 9005 black color.